



Color: Weather Copper/Desert Tan
Installer: Mike's Pole Barn


NRM-4500 PANELS • Exposed Fastener Panel

NRM-4500 panels are a cost-effective yet architecturally attractive metal panel. The 4000 panel can be specified in a wide variety of building applications including roofs, walls and soffits. It can be factory roll-formed in a maximum length of 44' 0" and a minimum length of 4' 0".

NRM-4500 features a $\frac{3}{4}$ " leg height and an anti-siphon groove to assist in weather resistance. The panel is the "go-to" panel for the post frame industry. Featuring a bell-top rib design, this panel offers superior strength at a fraction of the cost of metal products.

FASTENERS

For roofing applications, use wood-type screws fastened on 24" centers. Other screw types are available applications over structural steel and steel decking.

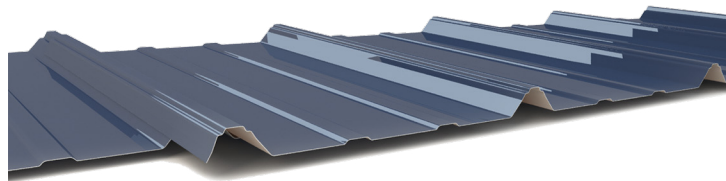

TRIM

All flashing and trim shall be fabricated by Nu-Ray Metals or a qualified fabricator. Flashings for this panel shall be 29, 28, or 26 gauge steel.

INSTALLATION

For roofing applications, NRM-4000 panels shall be installed over solid decking or open purlins ($\frac{5}{8}$ " plywood, nailboard insulation or equivalent, with an underlayment of 30# roofing felt applied horizontally from eave to ridge.) Panels shall be fastened on 24" centers (roof) or 48" centers (wall). Minimum roof pitch is 3:12.

HANDLING

Vinyl masking is provided on all steel sheet to help protect materials where extra handling is expected.


WARRANTY

A 40-year non-prorated finish warranty can be supplied covering finish performance.



Nu-Ray Metal Products, Inc. 1234 37th Street NW Auburn, WA 98001
Tel. (800) 700-7228 Fax (253) 833-7268 Web NuRayMetals.com

NRM-4500 Screw-Through Exposed Fastener Panel



NRM-4000 FEATURES

- Great panel for architectural, commercial and industrial roof, wall and soffit applications
- Standard anti-siphon groove
- Excellent load and span capacities
- Apply over open framing or solid substrates
- Export crating available
- Minimum 3:12 roof pitch

PANEL DEPTH : 3/4"

PANEL COVER WIDTH : 36"

PANEL LENGTHS: 5'0" to 44'0" standard

METAL OPTIONS

- 29, 28 and 26 gauge G90 or AZ50 steel
- 16 oz. natural copper (special order)

SURFACE OPTIONS

- Standard as shown in cross-section above

FINISHES

- D2 Kynar 500® ULTRA-Cool™
- Zincalume Plus*
- Standard Kynar 500® ULTRA-Cool™
- Standard Silicone Modified Polyester (SMP)

Kynar® and Kynar 500® are registered trademarks of Arkema Inc. used under sublicense by Nu-Ray Metal Products, Inc.



(800) 700-7228

www.NuRayMetals.com

Questions? Contact our Technical Department at
info@nuraymetals.com